

OSZ-1021B-10V

SILICON BIDIRECTIONAL ZENER DIODE



ASYMMETRY TYPE BIDIRECTIONAL ZENER DIODE

APPLICATION : Surge ESD Protector

- DIE SIZE $0.195(\pm 0.02)\text{mm} \times 0.195(\pm 0.02)\text{mm}$
- DIE THICKNESS $100\mu\text{m} \pm 20\mu\text{m}$
- METALLIZATION
 - TOP Au
 - BOTTOM Au

- BONDING PAD SIZE
 - TOP ELECTRODE $125\mu\text{m} \times 125\mu\text{m}$
 - BOTTOM ELECTRODE

- SCHEMATIC DIAGRAM

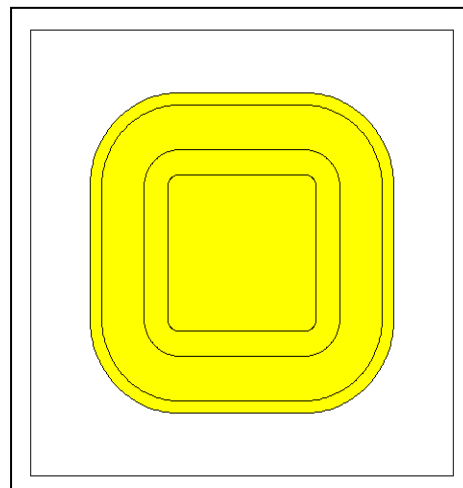


- ANNOTATION :
 - Parallel with one LED
 - Single pad (one wire bonding applied only)
 - Double direction Zener

- ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Zener Voltage	$V_{Z(R)}$	$I_Z=5\text{mA}$	7.5		13.5	V
Forward Zener Voltage	$V_{Z(F)}$	$I_F=5\text{mA}$	5.0		7.0	V
Reverse Current	I_R	$V_R=5.0\text{V}$			0.1	μA
Forward Current	I_F	$V_F=4.0\text{V}$			0.1	μA

- THE DIRECTION OF BIAS IS USED TO ELECTRICAL CHARACTERISTICS TEST

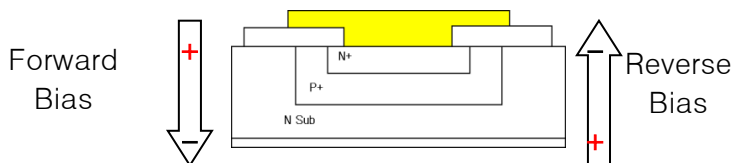

- ABSOLUT MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Maximum Rating	Unit
Power Dissipation	P_d	50	mW
Junction Temperature	T_J	150	$^\circ\text{C}$

ASYMMETRY TYPE BIDIRECTIONAL ZENER DIODE

PART NAME : BIDIRECTIONAL ZENER DIODE

PART NUMBER : 0SZ-1021B-10V

